



Rev.A.1.1

The JST138C-800D triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. From T2 terminals to external heatsink. Package TO-220C is RoJ -0.7wR52 Tm [1NdiJ6 (pur)7 (p)10 (os)4 (e)]TJ 084 5.

ELECTRICAL CHARACTERISTICS ($T_j=25$ unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	5	mA
				10	
V _{GT}		ALL	MAX.	1	V
V _{GD}	V _D =V _{DRM} T _j =125 R _L =3.3k	ALL	MIN.	0.2	V
I _L	I _G =1.2I _{GT}	- -	MAX.	15	mA
				20	
I _H	I _T =500mA		MAX.	10	mA
dV/dt	V _D =540V Gate Open T _j =125		MIN.	40	V s
(dV/dt) _c	(dI/dt) _c =5A/ms, T _j =110		MIN.	2	
t _{on}	I _G =20mA I _A =200mA I _R =20mA T _j =25		TYP.	3	s
t _{off}				30	

STATIC CHARACTERISTICS

Symbol	Parameter		Value(MAX.)	Unit
V_{TM}	$I_{TM}=15A$ $t_p=380$ s	$T_j=25$	1.6	V
V_{TO}	Threshold voltage	$T_j=125$	0.8	V
R_D	Dynamic resistance	$T_j=125$	41	
I_{DRM}	$V_D=V_{DRM}$ $V_R=V_{RRM}$	$T_j=25$	5	A
I_{RRM}		$T_j=125$	0.4	mA

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	junction to case (AC)	1.5	/W
$R_{th(j-a)}$	junction to ambient (AC)	60	/W

FIG.1: Maximum power dissipation versus RMS on-state current


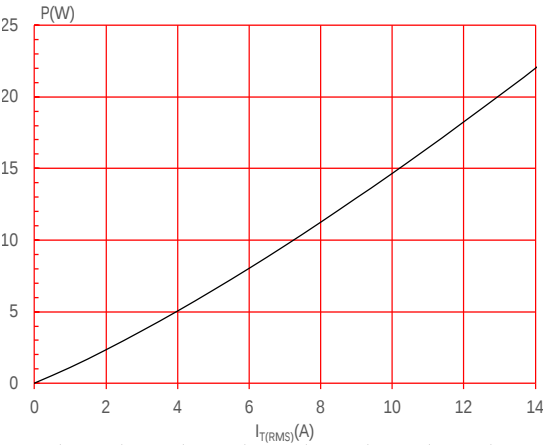


FIG.2: RMS on-state current versus case temperature

FIG.3: Surge peak on-state current versus

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards

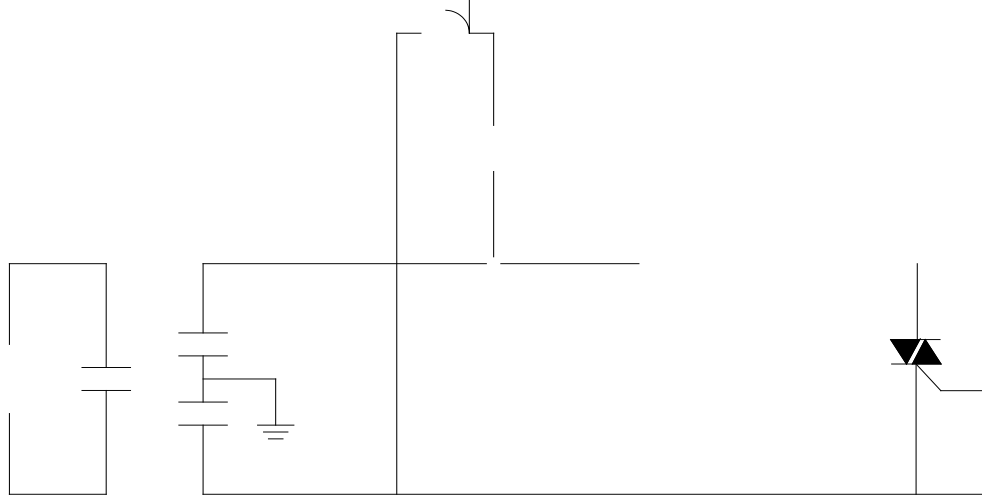

Information furnished in this document is believed to be accurate and reliable. However,
Jiangsu JieJie Microelectronics Co.,