



JMSL0630AU

N-Ch Power MOSFET

Product Summary

Parameter	Value	Unit
V_{DS}	60	V
$V_{GS(th)}$	1.7	V
I_D (@ $V_{GS} = 10V$) ⁽¹⁾	20	A
$R_{DS(ON)}$ (@ $V_{GS} = 10V$)	22	mΩ
$R_{DS(ON)}$ (@ $V_{GS} = 4.5V$)	30	mΩ

ns	Marking	MSL	T_J (°C)	Media	Quantity (pcs)
	SL0630A	1	-55 to 150	13-inch Reel	5000

s otherwise specified)


ol	Value	Unit
	60	V
	±20	V
	19.8	A
	12.5	
	46	A
	13.5	mJ
	20	W
	8.0	
rg	-55 to 150	°C



	Symbol	Min.	Typ.	Max.	Unit
Gate Threshold Voltage	$V_{(BR)DSS}$	60			V
	$V_{DS} = 48V, V_{GS} = 0V$			1.0	
	$T_J = 55^{\circ}C$			5.0	
	I_{GSS}			± 100	nA
	$V_{GS(th)}$	1.2	1.7	2.5	V
			22	27	m Ω
			30	38	m Ω
	g_{FS}		17.0		S
	V_{SD}		0.75	1.0	V
	I_S			20	A
	C_{iss}		288		pF
	C_{oss}		92		pF
	C_{rss}		22		pF
	R_g		5.0		Ω
	Q_g		5.8		nC
	Q_g				



Typical Electrical & Thermal Characteristics

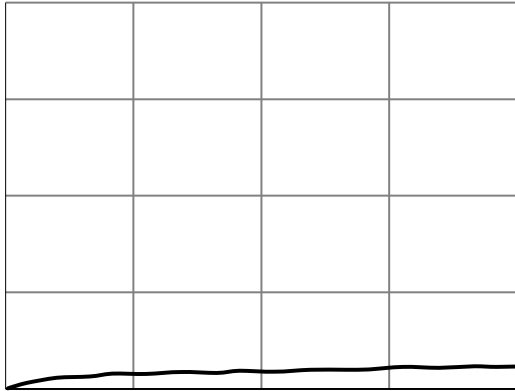



Typical Electrical & Thermal Characteristics

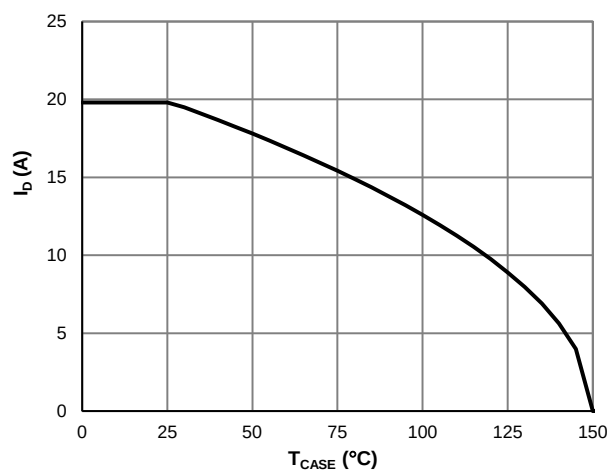


Figure 9: Current De-rating

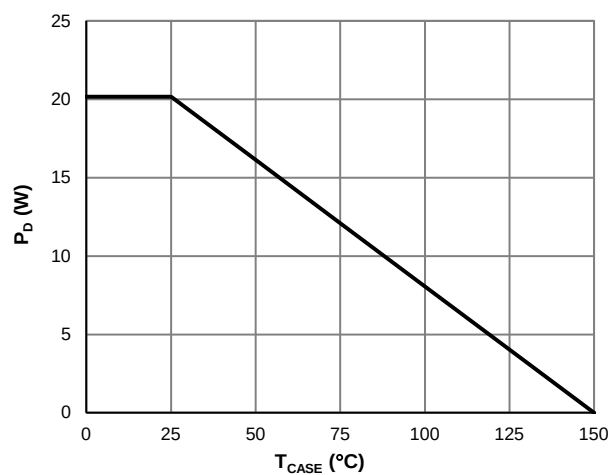


Figure 10: Power De-rating




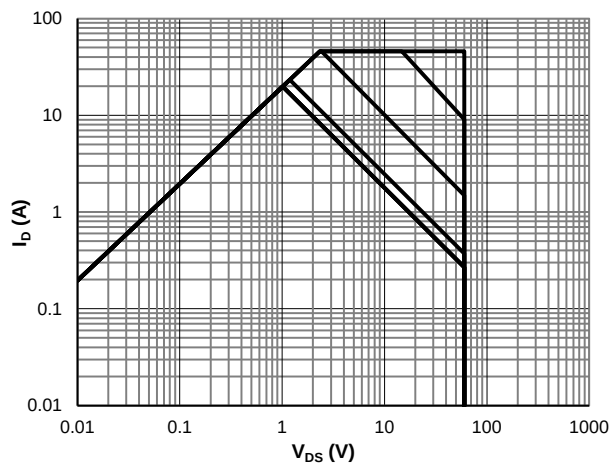



Figure 11: Maximum Safe Operating Area

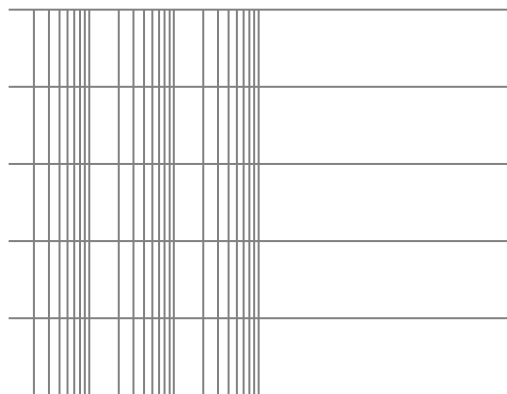



Typical Electrical & Thermal Characteristics

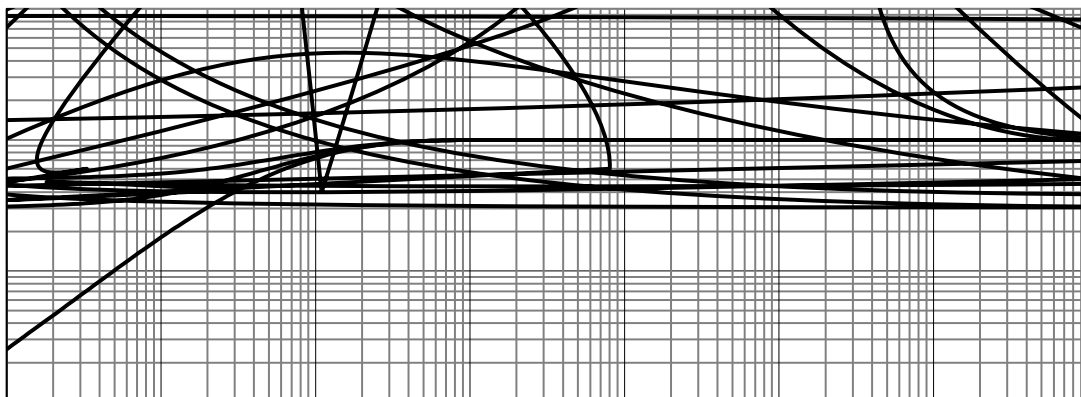



PDFN3x3-8L Package Information

