

## 650V 40A Trench and Field Stop IGBT

JJT40N65SE

### Key performance:

- 
- 
- 

### Features:


- 
- 
- 
- 

### Benefits:

- 
- 
- 

### Applications:

- 

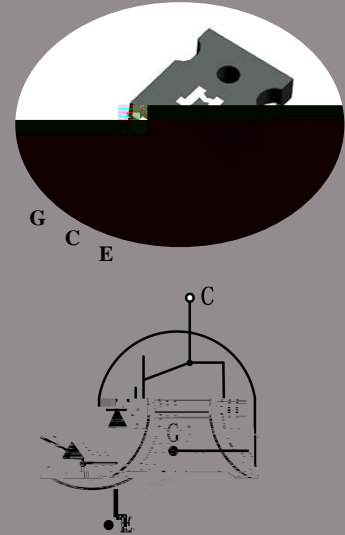

### Package parameters




### Maximum ratings

Symbol	Parameter	Values	Unit
			μ

### Thermal characteristics

Symbol	Parameter	Values		Unit
		Typ.	Max.	



Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	
		$\mu$				
						$\mu$
		mA				


Symbol          Parameter

ΔA DMM AB

RV









Symbol	Parameter	Test condition	Values			Unit
			Min.	Typ.	Max.	

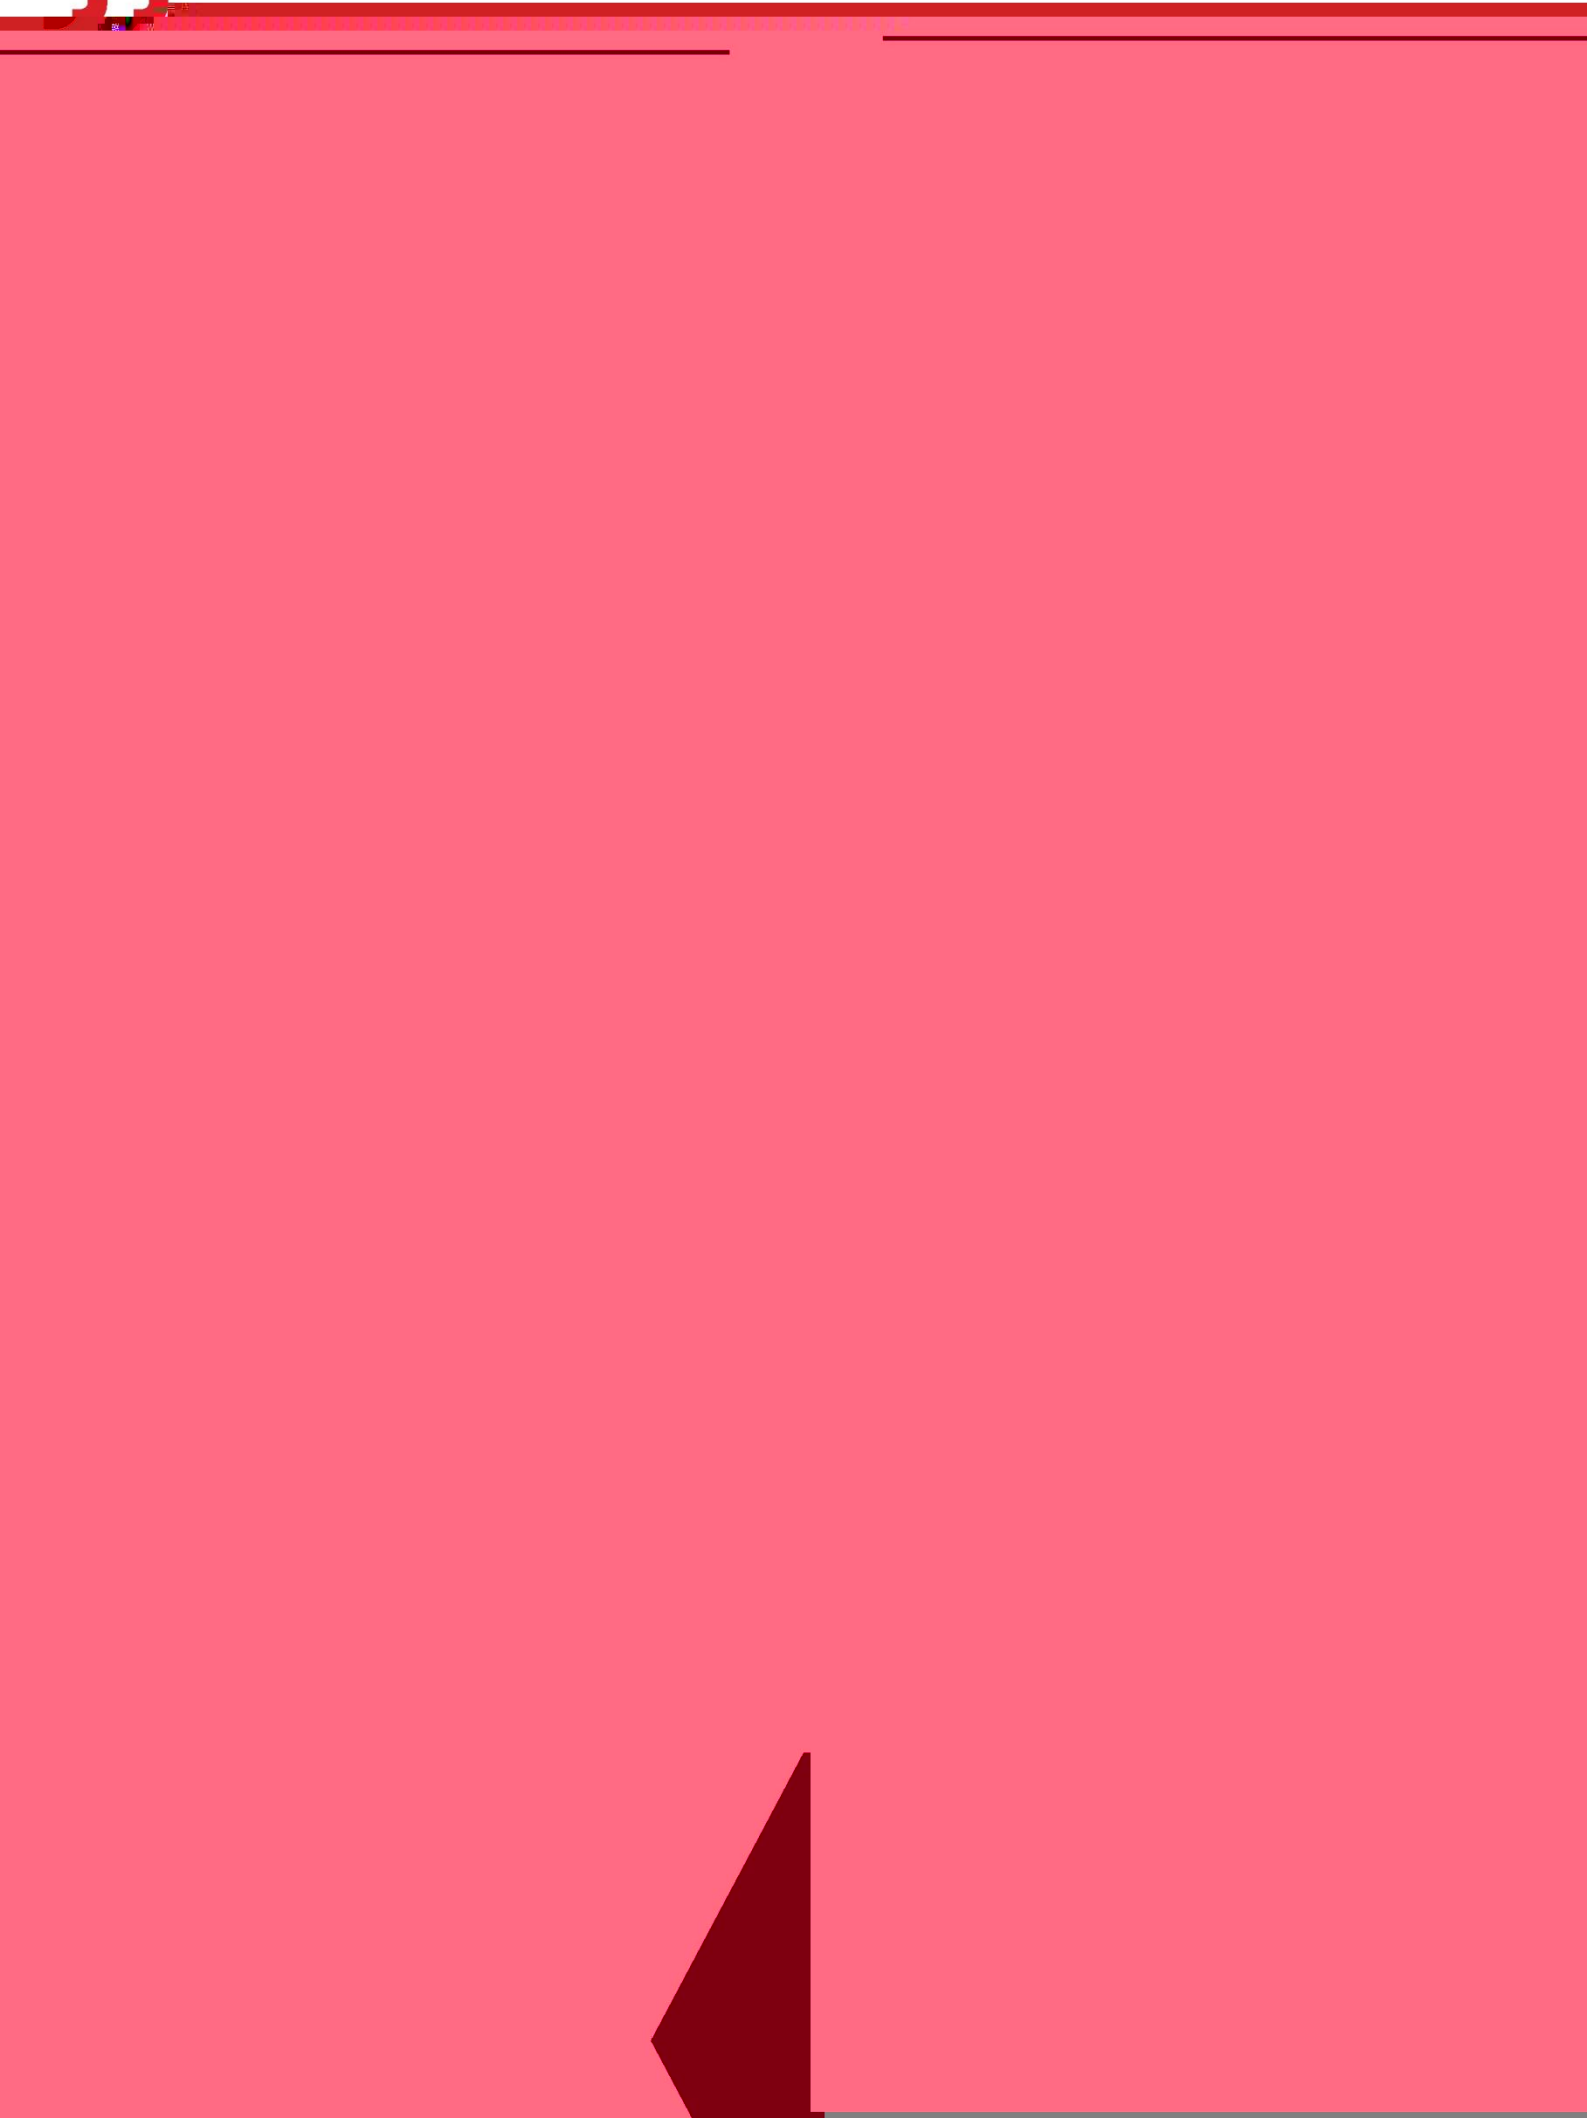





### Typical performance characteristics

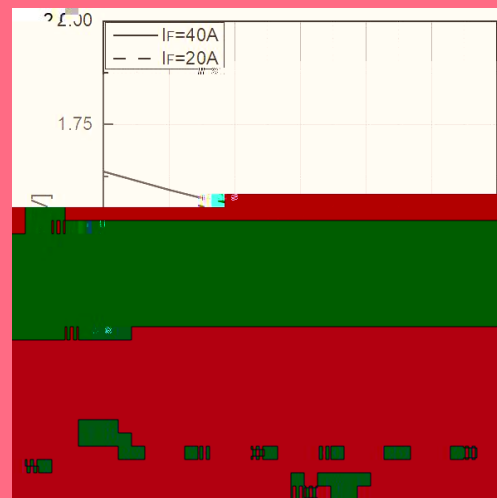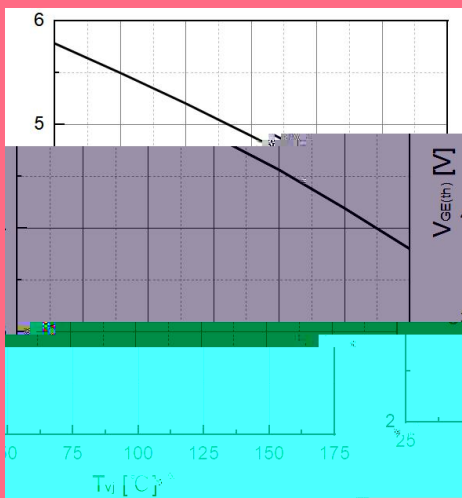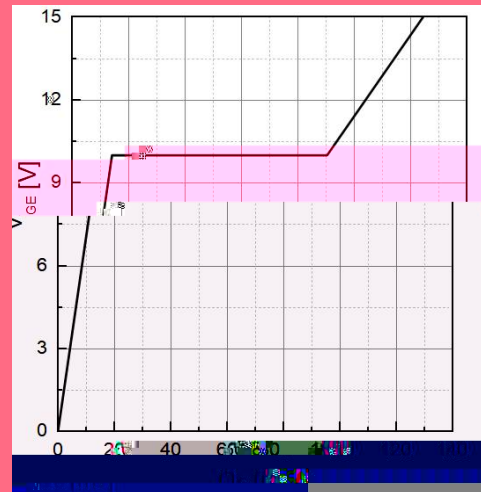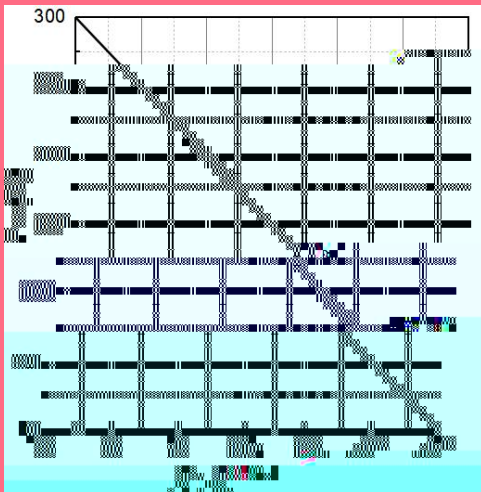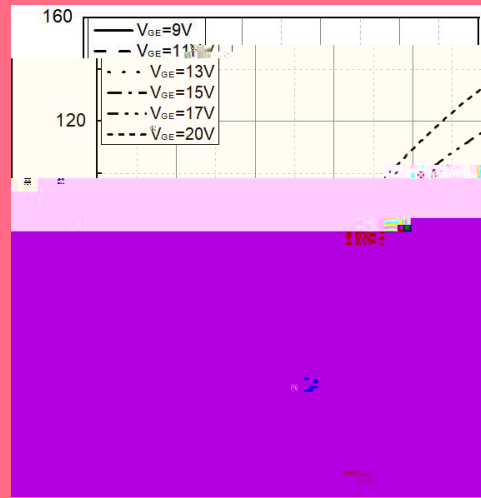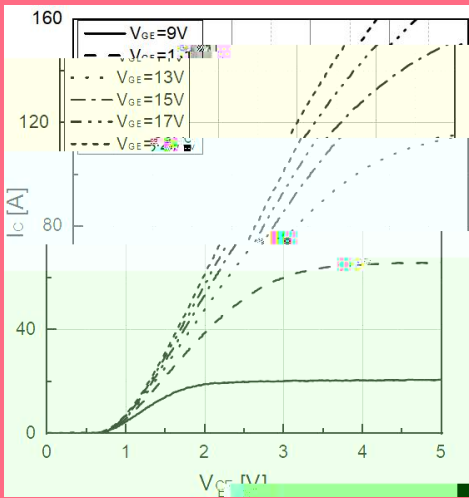







### Typical performance characteristics

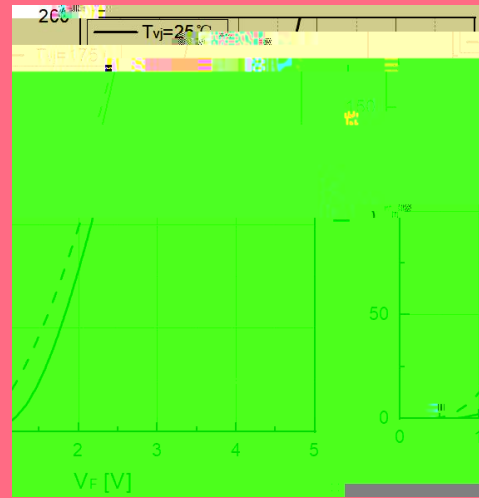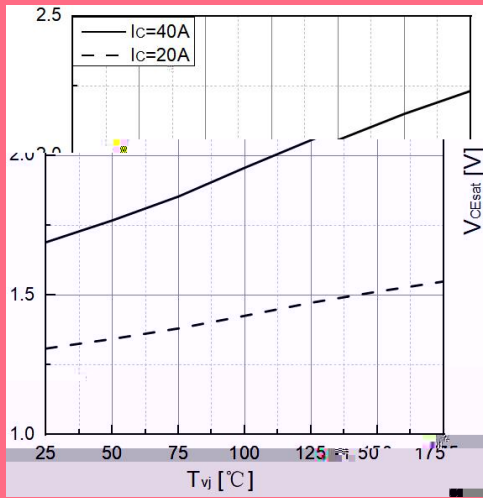



### Typical performance characteristics

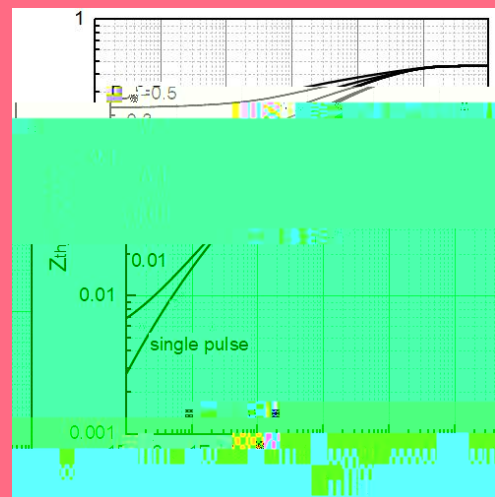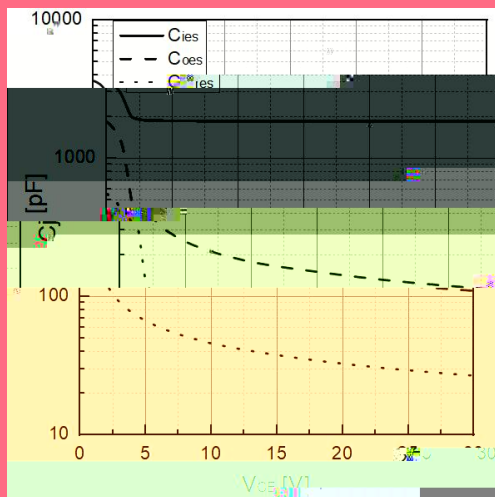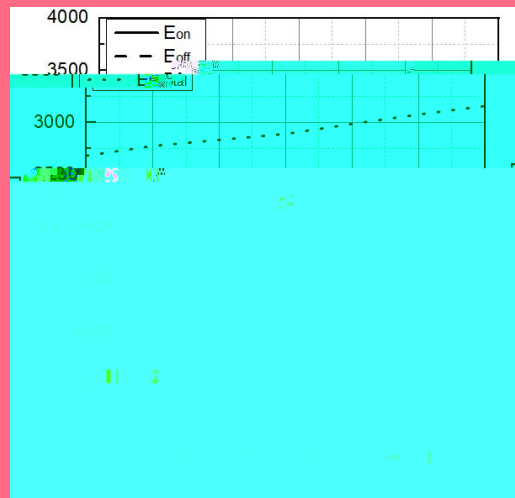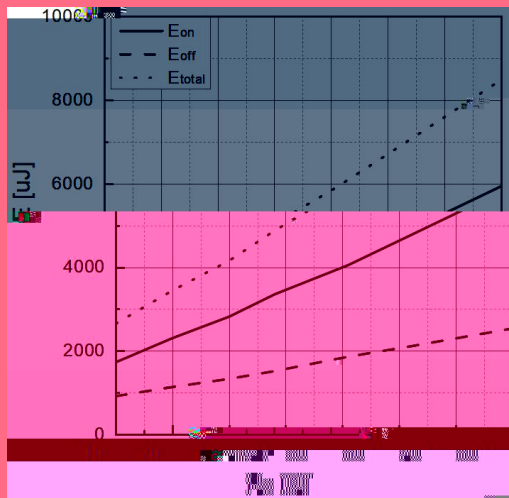






### Disclaimer

--0

Λ

ΣΠΕΚΤΡΟΜΗΤΡΟ

DOE

--0 Λ

--0

Γ

Η Η

Η

α

DWA

Σ

ΓΕΝΙΚΟ

DOE

\

Ο ΓΕΝΙΚΟ

ΠΗΛΕ

Π

--0

ΓΣ

