


Peak	g	P_{GM}	1	at power	W
Peak pulse	se				
(T _j = 25 °C; non-repetitive; of static; FIG.					

ORDERING INFORMATION

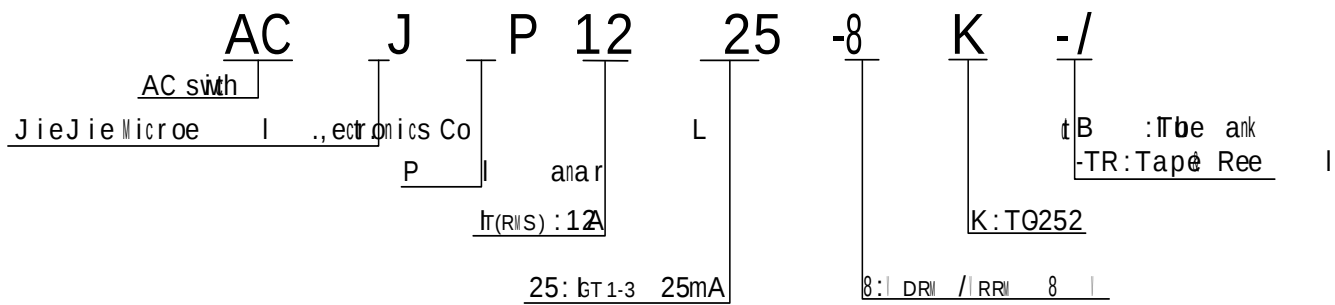

MARKING

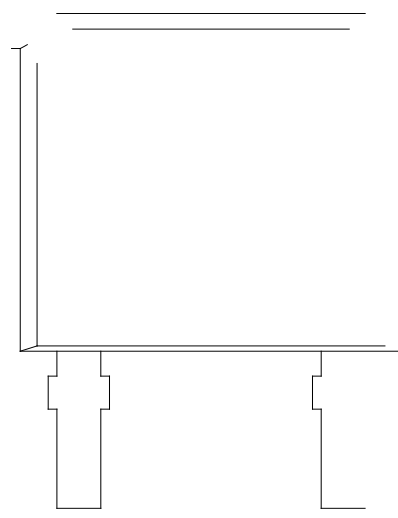


FIG.1: Maximum power dissipation versus RMS on-state current


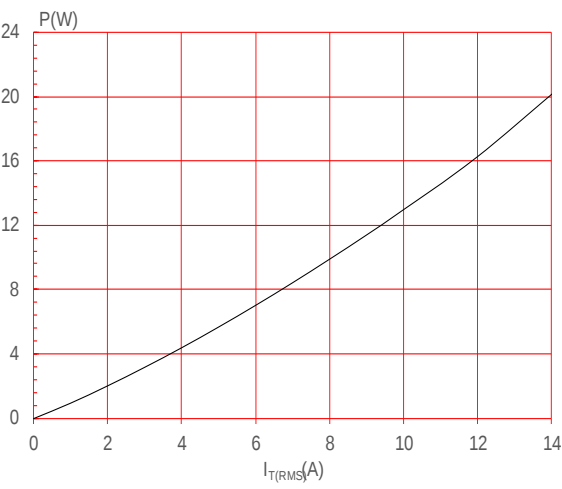


FIG.2: RMS on-state current versus case temperature

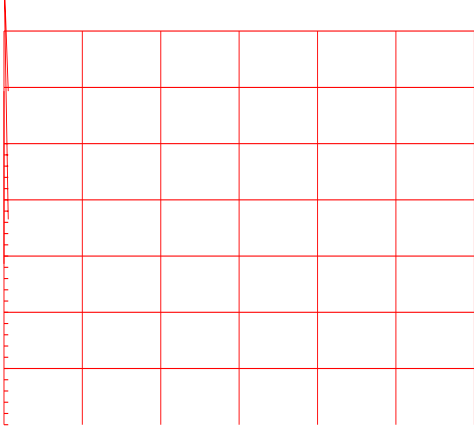


ORDERING INFORMATION


Order code	Voltage $V_{\text{DRM}}/V_{\text{RRM}}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
ACJP1225-8K	800	25	TO-252	80	Tube
ACJP1225-8K-TR				2,500	Tape & Reel

Document Revision History


Date	Revision	Change
Jul27, 2	A.1.	0 L 0
Oct22, 2	A.1.1	Revise PACKAGE MECHANICA



0	0
0	0



DELIVERY MORE INFORMATION

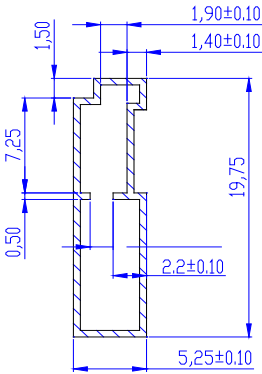

Information furnished in this document is believed to be accurate and reliable. JianJie Microelectronics Co., Ltd. assumes no responsibility for the use or misuse of the information contained herein. JianJie Microelectronics Co., Ltd. reserves the right to change the information contained herein without notice. JianJie Microelectronics Co., Ltd. is not responsible for any infringement of patents or other intellectual property rights that may result from the use of the information contained herein. JianJie Microelectronics Co., Ltd. is a registered trademark of JianJie Microelectronics Co., Ltd.