



**JCT1240E**

**JieJie Microelectronics Co., Ltd.**

## ORDERING INFORMATION

<b>J</b>	<b>CT</b>	<b>12</b>	<b>40</b>	<b>E</b>	<b>-/</b>
JieJie Microelectronics Co., Ltd.	SCRs	12:VDRM /VRRM 1200V	IT(RMS):40A	E:TO-263	Blank:Tube -TR:Tape & Reel

## MARKING


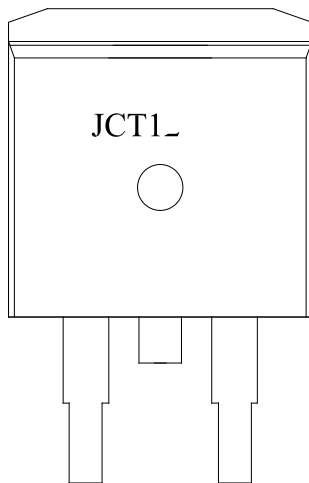




FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature

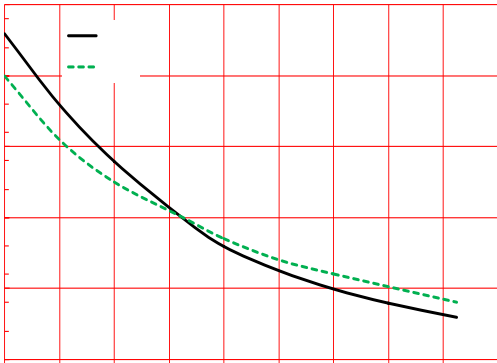



**ie Microelectronics Co., Ltd.**

ads to IEC-61000-4-5 standards.





PACKAGE MECHANICAL DATA



Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.90		10.20	0.390		0.402
B	14.70		15.80	0.579		0.622
C	9.40		9.60	0.370		0.378
D	2.40			0.094		
E	1.20		1.50	0.047		0.059
F	0.75		0.85	0.029		0.033

DELIVERY MODE



