

**JX008V 0.8A Sensitive SCR**

Rev.A.1.1

DESCRIPTION:

The JX008V SCR provides high dV/dt and dI/dt capability, suitable for use in electronic circuits. It is especially recommended for use in electronic circuits. Package SOT-223 is RoHS compliant.

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	0.8	A
V_{DRM}/V_{RRM}	800	V
I_{GT}	≤ 200	μA


ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage temperature	T_s	-40-150	
Operating temperature	T_j	-40-125	
Repetitive peak reverse voltage ($T_j=25^\circ C$)	V_{DRM}	800	V
Repetitive peak reverse voltage ($T_j=25^\circ C$)	V_{RRM}	800	V
Average on-state current ($T_c=89^\circ C$)	$I_{T(AV)}$	0.5	A
RMS on-state current ($T_c=89^\circ C$)	$I_{T(RMS)}$	0.8	A
Non-repetitive peak on-state current ($t_p=10ms, T_j=25^\circ C$)	I_{TSM}	8	A
Non-repetitive peak on-state current ($t_p=8.3ms, T_j=25^\circ C$)		9.9	

JX008V

JieJie M

ORDERING INFORMATION

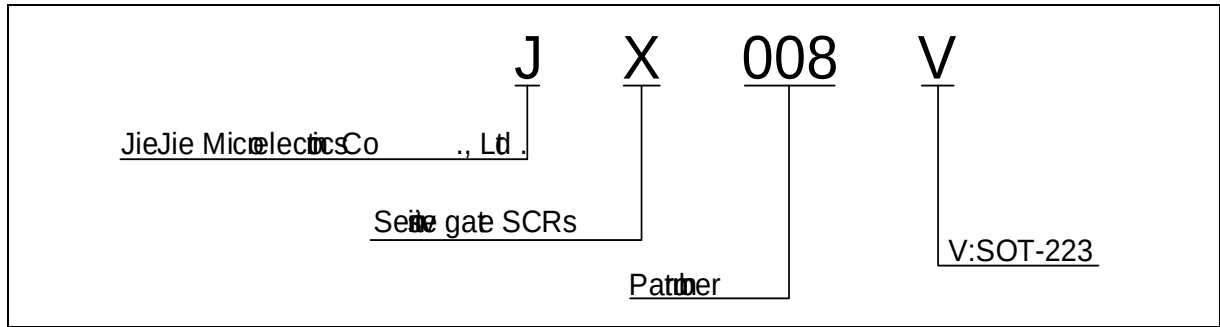

MARKING

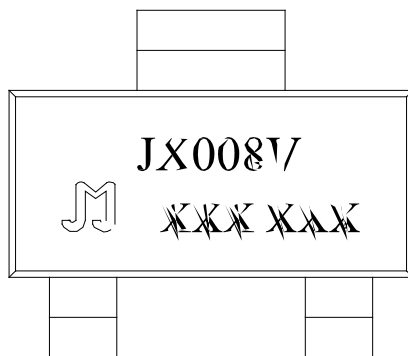


FIG.1: Main parameters
RMS on -be cat



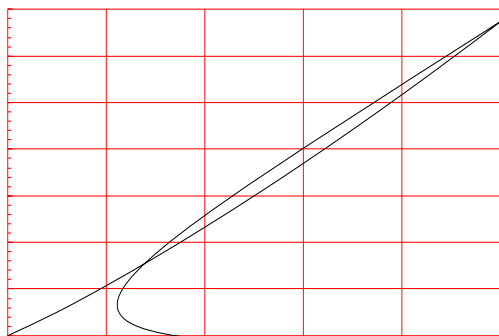


FIG.2: RMS on -be cat
temp

FIG.8 Test circuit for surge and load IEC -61000-4-5 standards

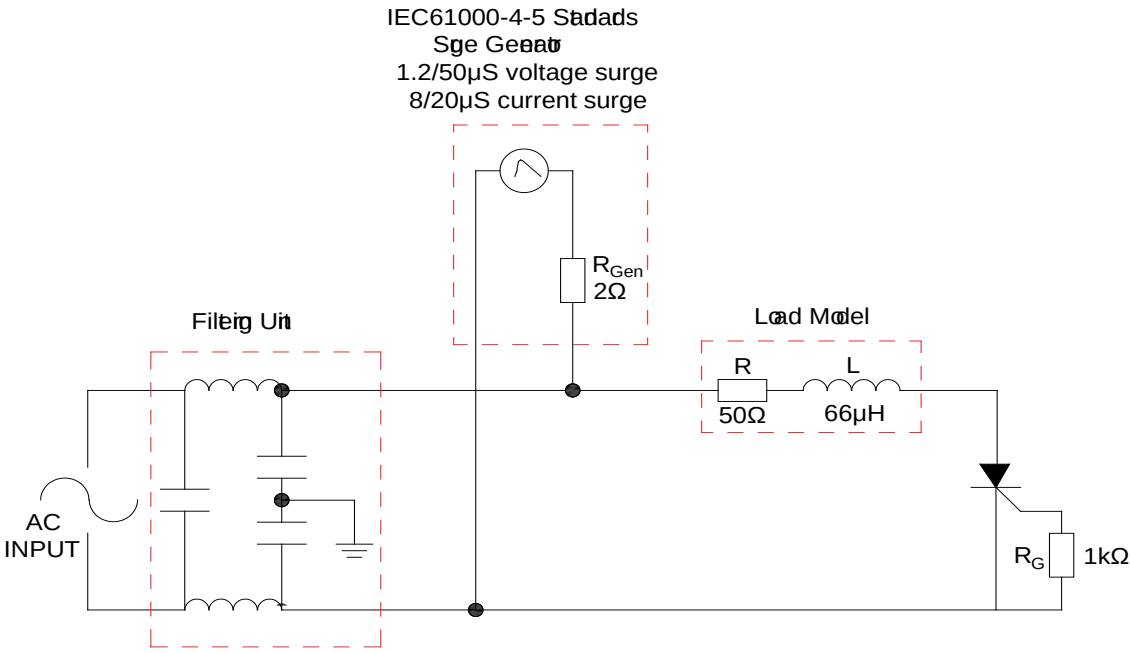

PACKAGE MECHANICAL DATA



Ref.	Dimensions					
	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
A	1.50	1.60	1.80	0.059	0.063	0.071
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	2.90	3.00	3.10	0.114	0.118	0.122
B1	0.60	0.70	0.80	0.024	0.028	0.031
C	0.22	0.26	0.32	0.009	0.010	0.013
D	6.30	6.50	6.70	0.248	0.256	0.264
E	3.30	3.50	3.70	0.130	0.138	0.146
F	4.40			0.173		
F1	2.20			0.087		
G	0.50		1.00	0.020		0.039
H	1.50	1.75	2.00	0.059	0.069	0.079
J	6.70	7.00	7.30	0.264	0.276	0.287
K						

DELIVERY MODE

Ref.	Dimensions					
	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
W	-		12.30	-		0.482
E	1.65	1.75	1.85	0.065	0.069	0.073
F	5.45	5.50	5.55	0.215	0.217	0.219
D0		1.55	1.60		0.061	0.063
D1		-	-			
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.95	2.00	2.05	0.077	0.079	0.081
10P0	39.80	40.00	40.20	1.567	1.575	1.583
A0	6.85	6.95	7.05	0.269	0.273	0.276
B0	7.15	7.25	7.35	0.280	0.284	0.288
K0	1.95	2.05	2.15	Max 0.076	0.080	0.084
T	0.20	0.25	0.30	0.008	0.010	0.012

If you find this document to be accurate and reliable. However, JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of any use of this document beyond its intended purpose. If you use this document for any other purpose, you shall be responsible for the accuracy and reliability of the information. If you have any suggestions or comments, please contact us. JieJie Microelectronics Co., Ltd. reserves the right to modify this document without notice. This document is for internal use only. It is not to be distributed outside the company. JieJie Microelectronics Co., Ltd. is a registered trademark of JieJie Microelectronics Co., Ltd. Copyright © 2025 JieJie Microelectronics Co., Ltd. All rights reserved.