



JX011N2 1A Sensitive SCR

Rev.A.1.1

1

011N2 1A Sensitive SCR / 1A

1A

1A Sensitive SCR

1A

1A Sensitive SCR -89- 2L 1A

1A

V_{GS}	P_{tot}	2	W
$(T_j=25^\circ C ; \rho = 10^{-6} \Omega \cdot cm ; \delta = 8 \mu m)$			


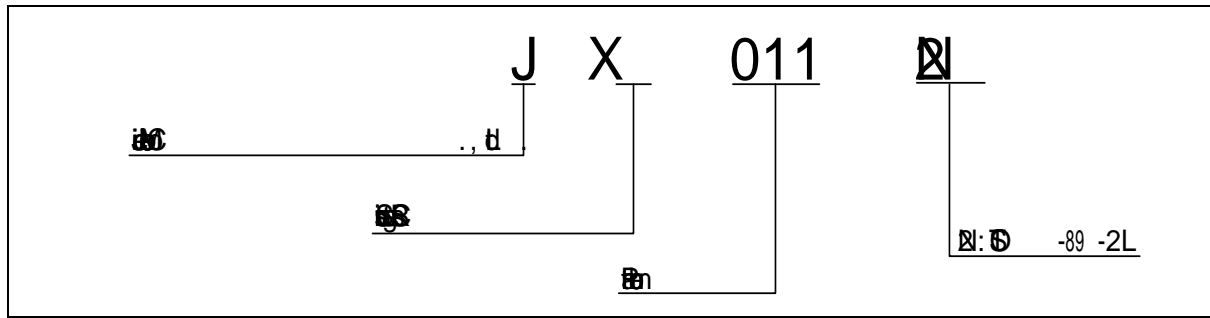


FIG.1: $V_{DS} - I_{D1}$

0 10

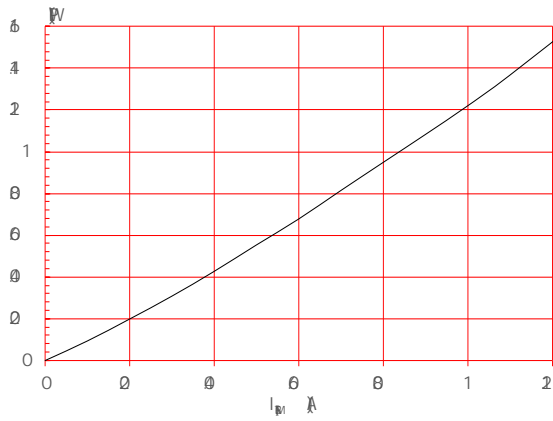


FIG.2: $V_{GS} - I_{D1}$

0 10


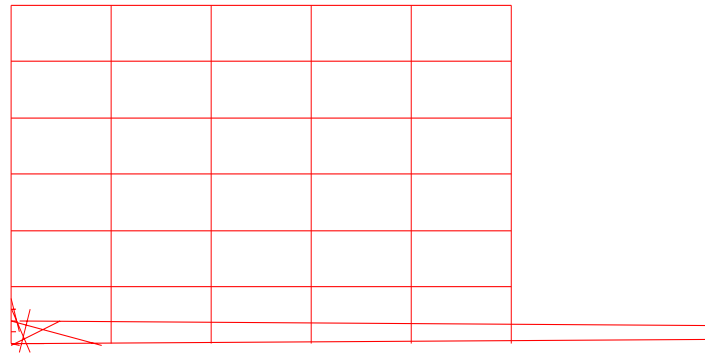


FIG.7: I_{ES}

I_{ES}

I_{ES}



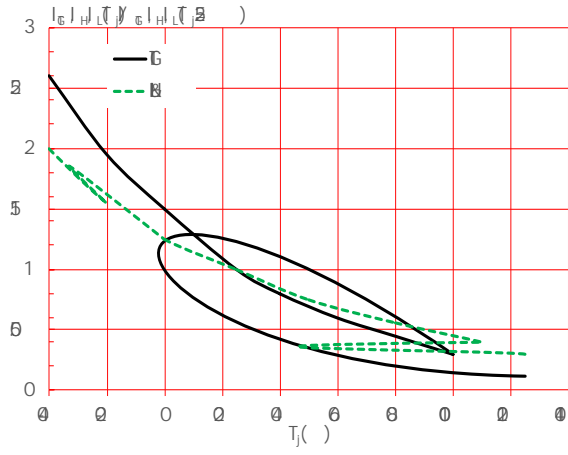



Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(μA)	Package	Base qty. (pcs)	Delivery mode
JX011N2	800	200	SOT-89-2L	4,000	Tape & Reel

Document Revision History

①	②	③
Ap .12, 2023	A.1.0	甲
©16, 2025	A.1.1	甲

1



JX0

© 2014 JieJie Microelectronics Co., Ltd.

J002 70 (ψ 00 φ) 00 u 02 (t 0 0 0 .) D 09 (0 -1 . (0J -0.00 00.009 0 -1.3.5d () 13 0 17 0 7 0 10 0 0 .