

ELECTRICAL CHARACTERISTICS (unless otherwise specified)


Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	5	mA
				10	

FIG.5: On-state characteris



I_{DSAT}
\$ V_{DS}

FIG.8 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

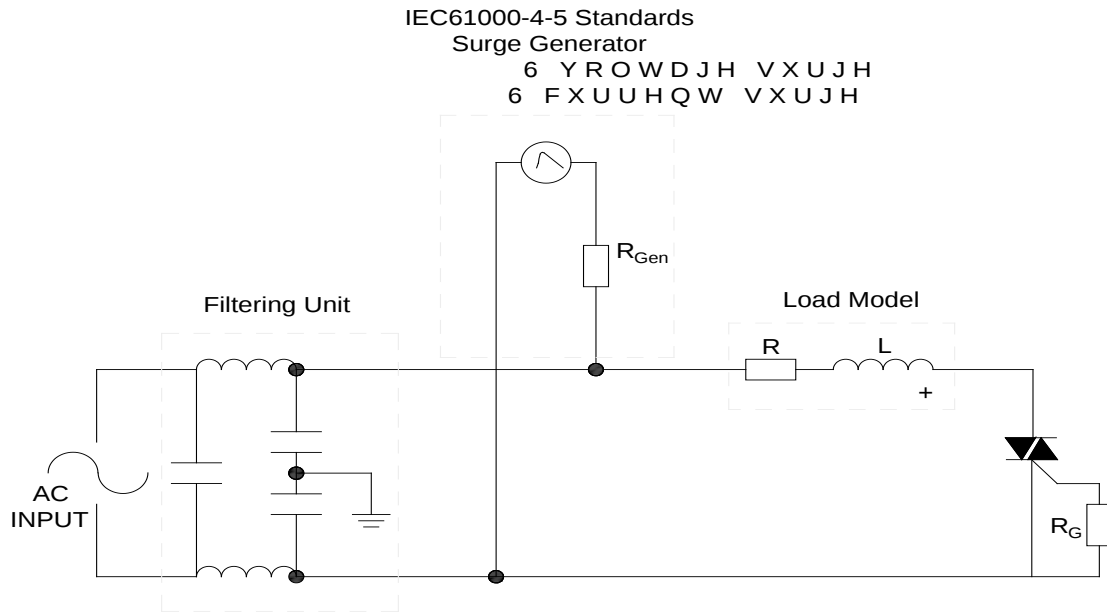

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	I _{GT} (mA)	Package	

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences