



JIEJIE MICROELECTRONICS CO., LTD.


JST04C-800BW 4A TRI[(0)-0.6 (608 -T)-25.4 9(0)-0.6 (3 (613.7 (112]TJ 0 T0.0T0.50

Peak pulse voltage ($T_j=25^\circ\text{C}$; non-repetitive, off-state; FIG.7)	V_{pp}	4	kV
--	----------	---	----

ELECTRICAL CHARACTERISTICS (unless otherwise specified)

I_{GT}	T_{CTD}	Q_{th}	V_{th}	U_{th}
I_{GT}	$V_D=12V$ $R_L=33\Omega$	- -	MAX	

ORDERING INFORMATION

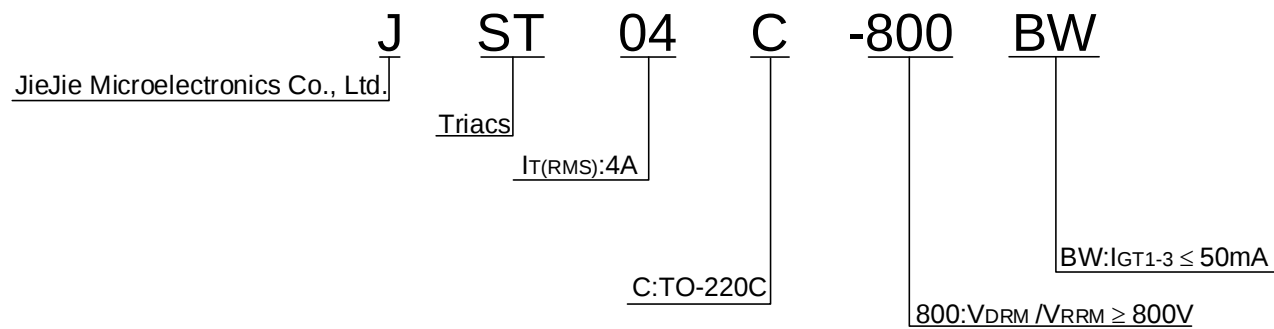

ORDERING INFORMATION

Ordering Code	V _{DS} V _{DRM} /V _{RRM} (V)	IGT (μs)	Package	Lead Length (mm)	Lead Form
		- -			
JST04C-800BW	800	50	TO-220C	50	Tab

Revisions

Date	Revision	Changes
Apr.11, 2023	A.1.0	Last updated
Oct.15, 2025	A.1.1	Revise PACKAGE MECHANICAL DATA

PACKAGE MECHANICAL DATA



