



W O W A R

R A 1

DESCRIPTION:

1. $V_{DS} = -10V$ $I_{DQ} = 0$
 2. $V_{GS} = 0V$
 3. $V_{GS} = 0V$
 4. $V_{GS} = 0V$
 5. $V_{GS} = 0V$ $I_{DQ} = 0$ $S = 0$ $I_{DQ} = 0$
 6. $V_{GS} = 0V$ $I_{DQ} = 0$ $P_{DQ} = 0$
 7. $V_{GS} = -2V$ $I_{DQ} = 0$

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage Temperature	T_{stg}	-40 to 150	°C
Junction Temperature	T_j	-40 to 150	°C
Drain-Source Voltage (V _{GS} = 0V, I _{DQ} = 0)	V_{DS}	80	V
Gate-Source Voltage (I _{DQ} = 0)	V_{GS}	80	V
Drain Current (V _{GS} = 0V, V _{DS} = 1V)	I_{DQ}	1	A
Drain Current (V _{GS} = 0V, V _{DS} = 1V, P _{DQ} = 0)	I_{DM}	2	A

(j 2 ; 0 - 5 - 8)	V _p	4	k
---------------------	----------------	---	---


ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Unit	Value	Notes
I _G	V _D L 3	-	3	
V _G	V _D L 3	-	1	
V _D	V _D L 3	-		

6 : M
0 0

0 M +
0

B
g
h

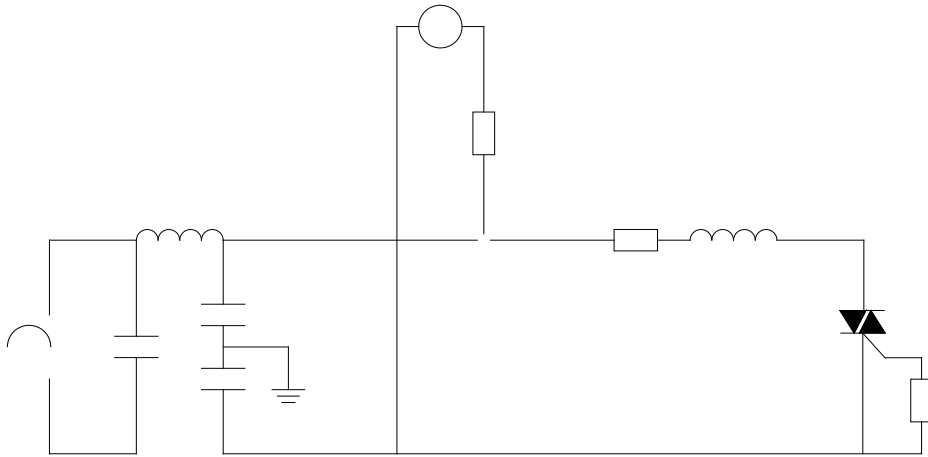

ORDERING INFORMATION

①	V _{BI} V _{RI} V	② (n)	③	④	⑤
		H- I- J			
\$ W 80 W	80	5	⑥ -2 -2	40	⑦

PACKAGE MECHANICAL DATA

