




7KH -67 ) &: WUXILDFEØH IRU JHQHUDO SXUSRVH  
 \$& VZLWFKLQJ ,W FDQ EH XVHG DV DQ 21 2)) IXQFWLRQ  
 LQ DSSOLFDWLRQV VXFJKODWLRQWILQGFWLRQ PRWRU  
 VWDUWLQJ FLUFQWVURIRURSHKUDWLRQ LQ OLJKW  
 GLPPHUV PRWRU VSHHG FRQWUROOHUV -67 ) &:  
 VQXEEHUOHVV WOODFHLFRIPPSHQGLHG IRU XVH RQ  
 LQGXFWLYH ORDGHVWNUXVQCSJODQWLF SDFNDJH  
 -67 ) &: SURYLGHV D UDWHG LQVXODWLRQ YROWDJH RI  
 9506 FRPSO\LQJ ZLWK 8/ VWDQGDUGV )LOH UHI (  
 3DFNDJH Å• °00` 00P '0 TVGXVH ODWL '0 J B° 0€ð



\$YHUDJH JDWH SRZHU GLVVLSDWLRQ 7		
3HDN JDWH SRZHU	3*0	:
3HDN SXOVH YROWDJH 7M QRQ UHSHWLWLYH RII VWDWH ), *	9SS	

7M XQOHVV RWKHUZLVH VSHFLILHG

Symbol	Test Condition	Quadrant	Value	Unit
,*7	9 9 5		0\$;	P\$
9*7			0\$;	9

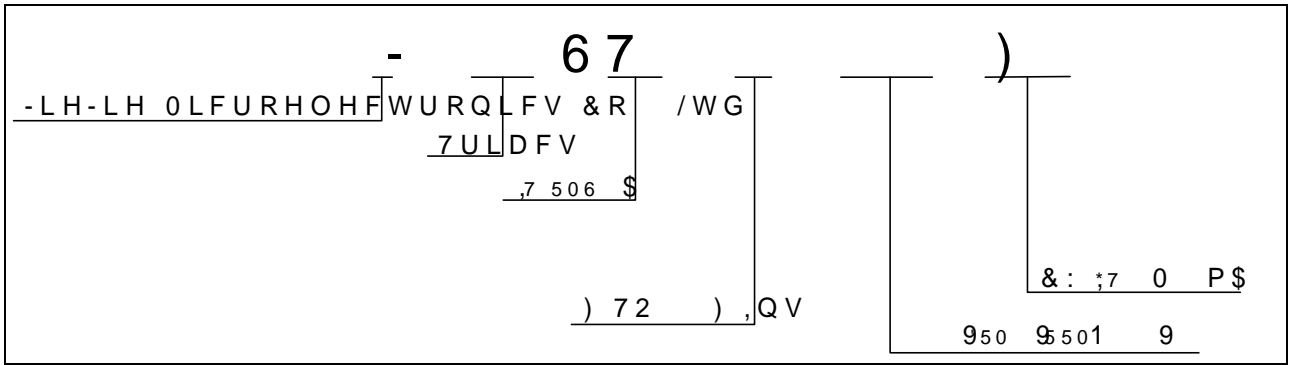

& :


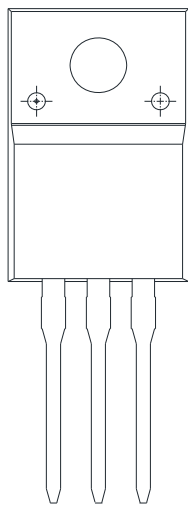


FIG.1: 0D[LPXP SRZHU GLVVLSDWLRQ FIG.2: U506 R506 VWDWH FXUUHQW YHU  
RQ VWDWH FXUUHQW WHPHUDWXUH



**JST08F-800CW**

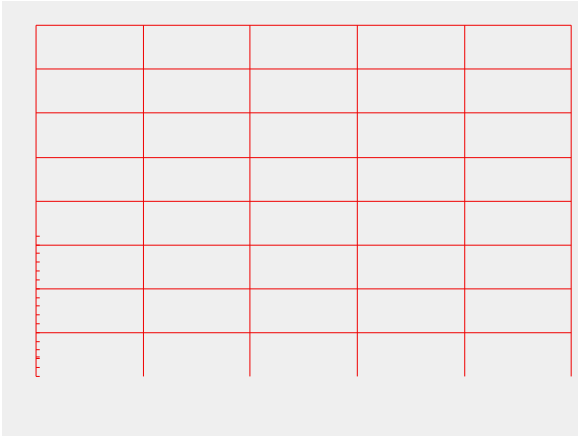

Voltage $V_{DRM}/V_{RRM}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
	H- I- J			
800	35	TO-220F(Ins)	50	Tube

### Document Revision History

5HYLVLRQ	&KDQJHV
----------	---------





,QIRUPDWLRQ IXUQXPHQW ILQ VIKOLHGMMB DORGEWHHDFLFXEUDH +  
 -LDQJVVX -LH-LH 0L&RRHOWHGF WDJRQXLFHV OLRV UHRUS RQKVL ER QVH  
 RI XVH ZLWKRXW FRQVLGHUDWLRQ IRG LW FKHQURPUDVLRQR  
 LQ WKLV GRFXPHQW LV VXEMHFW WR FKDDWJZKHLQKORXWJQR  
 VLJQHG -LDQJVSOLHVLZILWRKPWKH DJUHHPHQW  
 3URGXFVV DQG LQIRUPDWLRQ SURYLGHG JHQHWLVRGSDXPH  
 -LDQJVVX -LH-LH DVVXPEVQQW\UIRVS DQVI LQWUKHQJHULHQWVRR  
 SDUWLHV ZKLFK PD\ UHVXOW IURP WKHPDWLFRQVXFKVSGRFG  
 VXSHUVHGHV DQG UHSODFHV DOO LQIRUPDWLRQ SUHYLRXV  
 LV D UHJLVWHUHG WJDXGLHDUN RUF-ULRHOWHGF WURQLFV &  
 &RS\ULJKW -LDQJVVX -LH-LH GLF&RRHOWHGFVSPQHLGLJKWV UHVI