


 (T _j =25℃ ; R _{θJA} =33℃/W -FIG.7)	V _p	2	kV
---	----------------	---	----

ELECTRICAL CHARACTERISTICS (T_j=25℃)

Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33Ω	- - -	MAX .	50	mA
				70	

V_{GT}

ORDERING INFORMATION

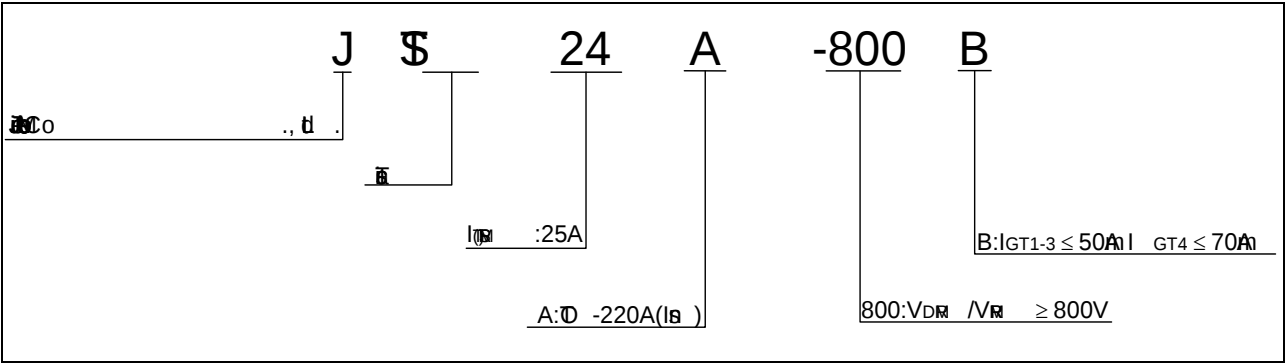

MARKING

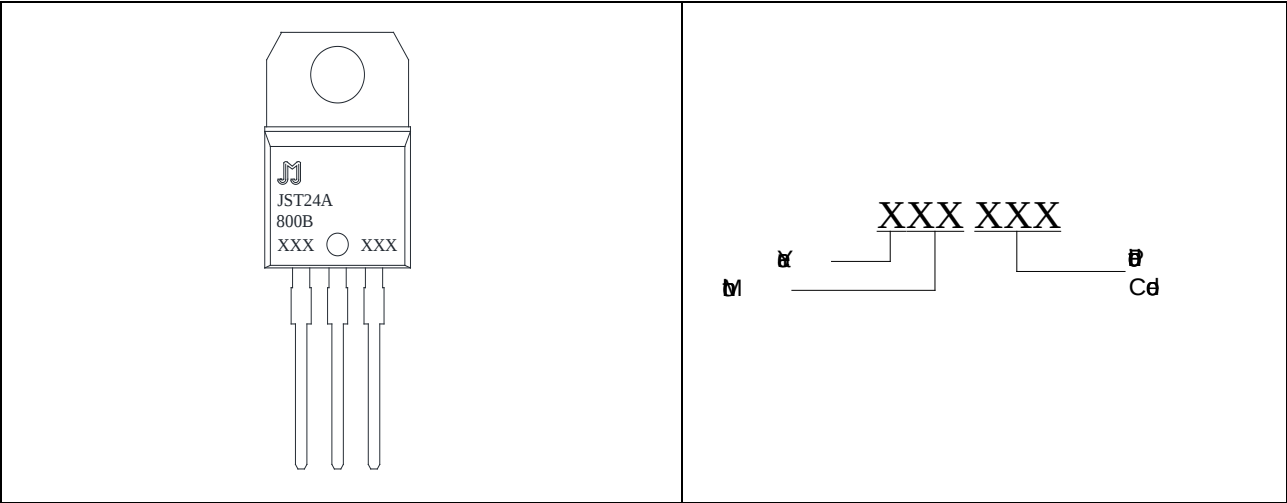


FIG.1: 

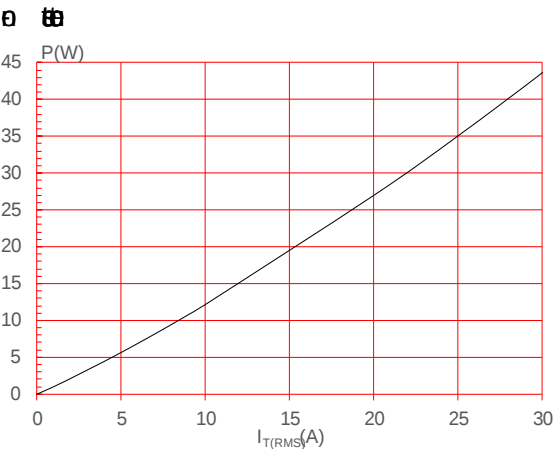


FIG.3: 



FIG.2:  - 


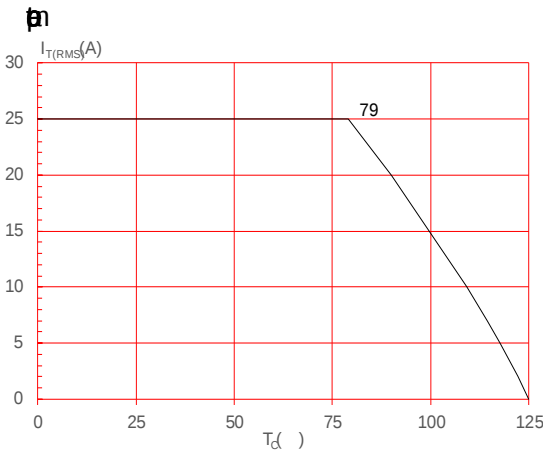


FIG.4:  - 

FIG.7 61000-4-5

-61000-4-5

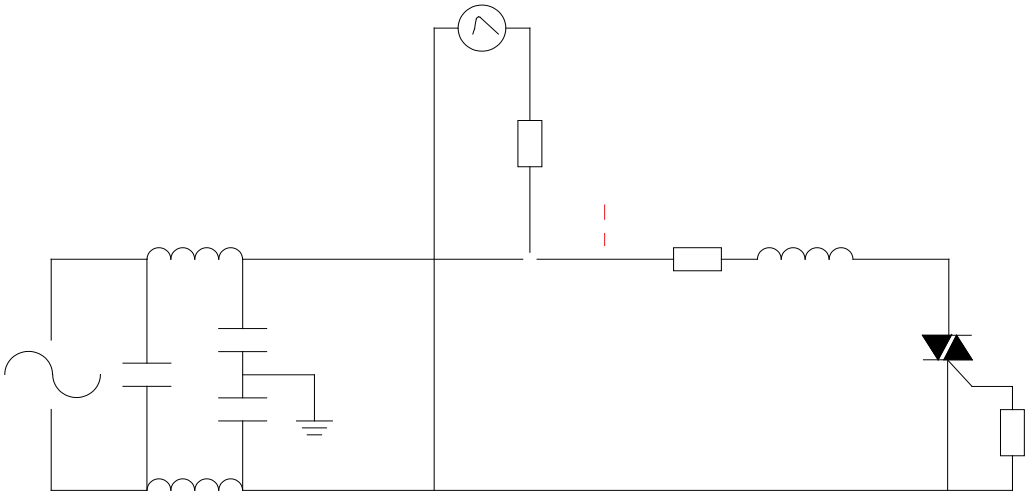

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)		Package	Base qty.	Delivery mode
		-	-			

PACKAGE MECHANICAL DATA

