

Features

- Half-bridge SCR configuration integrated in a single package
- With high thermal conductivity DBC as the Insulation

Product Summary


• Weibull (Weibull) 274 (mole) 7.015w provide 4.4747127674 (P50.3 (0.274) 0.6 (f 9.272g 9.2727 8 (-w 11.04 -0 0 24

Electrical Characteristics (@ T_C = 25°C unless otherwise specified)


Parameter	Conditions	Symbol	Values			Unit
			Min.	Typ.	Max.	

Peak forward voltage	I _T =750					
----------------------	---------------------	--	--	--	--	--

Circuit Diagram



Package Outlines (mm)

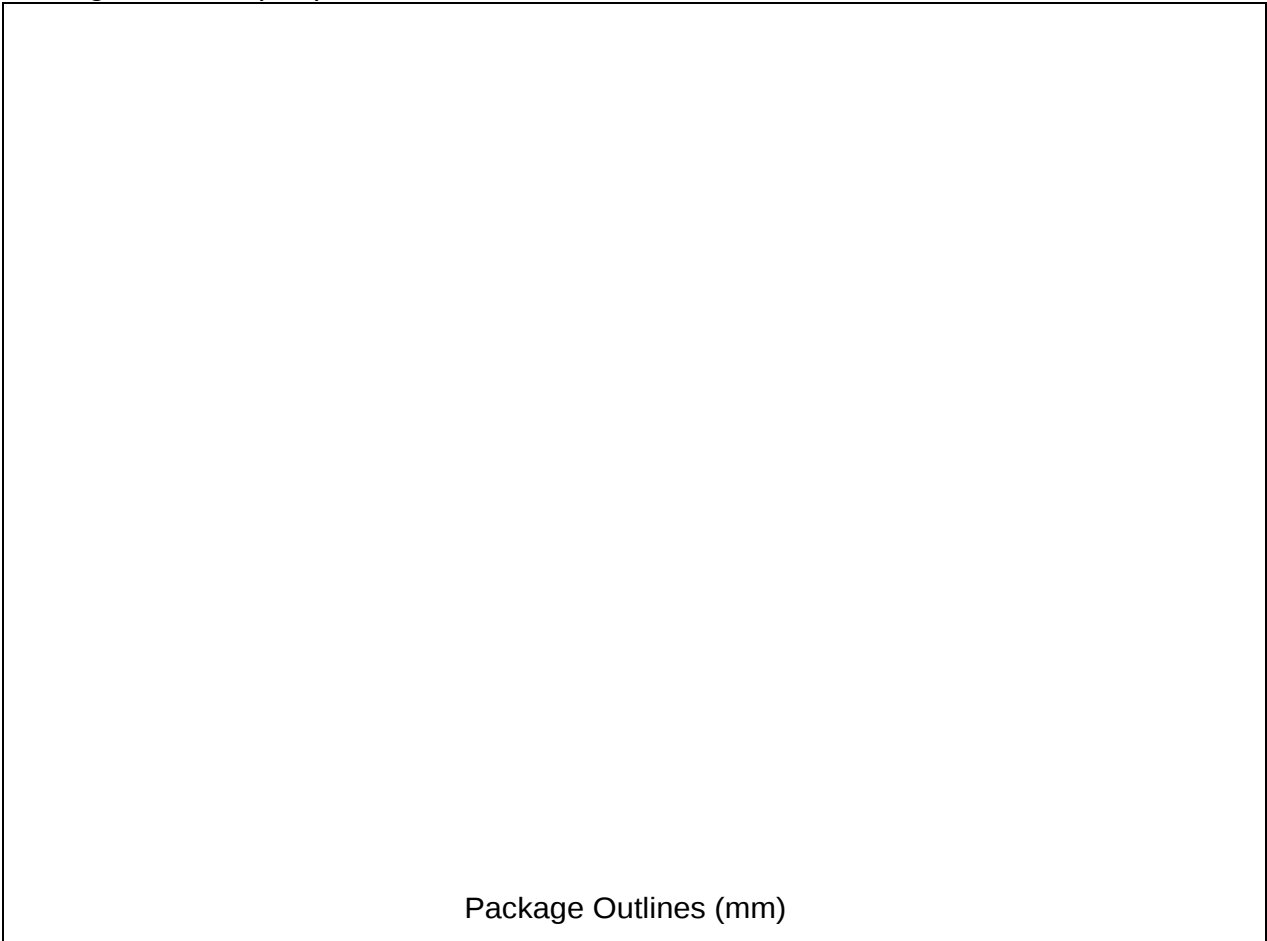

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Semiconductor Co., Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. This information in this document is subject to change without prior notice. Notwithstanding this, Jiangsu JieJie will fully comply with the terms outlined in a signed agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may arise.